

WASHINGTON MILLS


BLASTITE[®] BT

WASHINGTON



Distributed By:

Dawson-Macdonald Co., Inc.
845 Woburn Street - Wilmington, MA 01887
Phone: (800) 556-4456 (toll free) Fax: (978) 657-8740
E-mail: info@dawson-macdonald.com
Website: www.dawson-macdonald.com





Hard, Tough, Productive!

BLASTITE® is the hardest, toughest and most productive blasting abrasive you can buy. Of all the blasting materials on the market, BLASTITE® stands alone in terms of hardness, toughness and the productivity it offers you.

Durable BLASTITE® grains, when propelled by air, become powerful multi-edged abrasive tools that penetrate work pieces, dig out microchips, and consistently leave exceptionally clean, etched surfaces in their wake. BLASTITE® grains are highly effective on many surfaces including: metals, glass, ceramics, marble, granite and other stone.

Manufactured with Precision Care

BLASTITE® is produced by super-heating abrasive grade bauxite in electric-arc furnaces at temperatures exceeding 4,000 degrees Fahrenheit. The resulting aluminum oxide is poured into ingots, cooled and then systematically crushed into trillions of particles at our multiple processing plants in the United States, Canada and the U.K.



The entire manufacturing process is precisely monitored throughout. BLASTITE® is carefully analyzed for lot-to-lot uniformity and closely inspected for grain characteristics to insure you of optimal performance in dry or wet blasting applications.

Superior Properties


BLASTITE® has a single crystalline structure – marked by uniformly high strength throughout. Its grains are manufactured in blocky shapes with multiple, sharp cutting edges. BLASTITE® is an inert material containing no free silica or contaminants. It is unaffected by atmosphere and non-reactive with alkalis or acids.

Unmatched Availability

No other abrasive grain manufacturer can match the ready availability of BLASTITE®. Washington Mills is one of the world's largest producers of aluminum oxide, manufacturing in excess of 100 million pounds annually. We produce BLASTITE® specifically for blasting applications, and in sufficient quantities and a broad enough range of grit sizes to meet your every need.

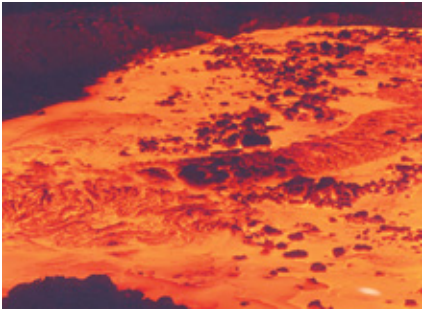

Outstanding Performance

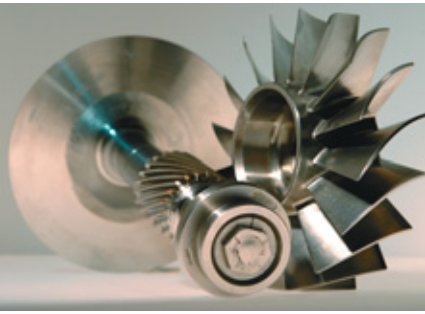

BLASTITE® Characteristics

Performance Benefits

exceptional hardness

shorter work cycles, increased production, lower labor costs, optimal equipment utilization

**durability
(up to 20 passes)**


less downtime to change system, less material used, lower disposal costs, less storage space required, less material handling, less dust, reduced equipment/component wear

**light weight
(1/3 the weight of comparable steel media)**

more abrasive particles per pound, more effective use of airstream

**no free crystalline silica
(unlike sand and many naturally occurring minerals)**

no silicosis hazard to workers

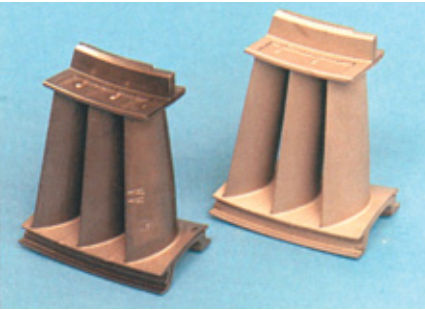


Consistent High Quality

BLASTITE® is a virgin aluminum oxide. It contains none of the many impurities and contaminants found in re-claimed or re-processed aluminum oxide products.

BLASTITE® is produced to conform with all major industrial and governmental standards including: • CID A-A-59316 • ANSI B74.12-2001 • General Electric Aircraft Engine Group D50TF5 and most Pratt and Whitney Aircraft PMC specifications.

Statistical Process Control (SPC), in place at all Washington Mills facilities, assures you a minimum of grain variability from one shipment to another.

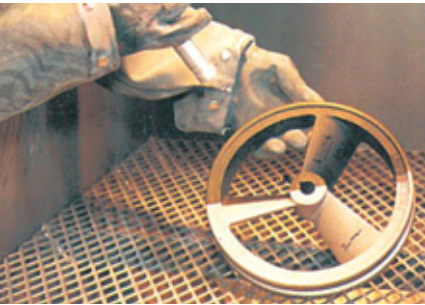

Typical BLASTITE® Applications

- cleaning of investment castings
- scale removal in steam turbines
- surface preparation for thermal spray coatings
- rust removal
- hard oxide removal (titanium, zirconium, etc.)
- mill scale removal
- heat treat scale removal
- glass etching or frosting
- monument lettering
- aircraft engine overhaul
- matte finishing

Other Washington Mills Blasting Abrasives

NIAGARA BLAST®

- group graded virgin brown aluminum oxide
- used in blasting applications where size control is less critical
- available in grit sizes: 20, 40, 60, 80, 120, 150 and 180

DURALUM® SPECIAL WHITE Aluminum Oxide

- more closely graded, high purity, white aluminum oxide
- composed of sharp, friable grains, specially treated for removal of iron
- premium material for use where surface contamination is unacceptable
- used in applications such as cleaning and deburring electrical circuit boards and medical devices
- available in grit sizes 12 to 1200

CARBOREX® RA

- extremely hard, sharp silicon carbide grain that is more friable than aluminum oxide
- used to blast extremely hard materials
- available in grit sizes 12 to 1200



Composition Analysis of Washington Mills' Blasting Grains

BLASTITE® NIAGARA BLAST®

AL ₂ O ₃	96.12%
TiO ₂	2.70%
SiO ₂	.67%
Fe ₂ O ₃	.11%
Other Oxides	.40%

DURALUM® SPECIAL WHITE

AL ₂ O ₃	99.60%
SiO ₂	0.03%
Fe ₂ O ₃	0.02%
Na ₂ O	0.35%

CARBOREX® RA

SiC	97.60%
SiO ₂	0.60%
Si	0.80%
Fe	0.20%
Al	0.30%
C	0.50%

Hardness Comparisons

Blasting Media	MOHS Value	Knoop Value
Diamond	10.0	7000
CARBOREX RA® (SiC)	9.5	2480
BLASTITE® (aluminum oxide)	9.0	2100
Garnet	7.0	1360
Quartz	7.0	820
Sand	6.0	560


* The MOHS Hardness Scale measures the hardness of aluminum oxide in relation to other blasting media – on a scale of 1-10.

* The Knoop scale measures hardness on a scale of 0 – 7,000

Grit Size Conversion

Grit Size	Inches (average)	Microns (average)
16	0.043	1092
20	0.037	940
24	0.027	686
30	0.022	559
36	0.019	483
46	0.014	356
54	0.012	305
60	0.010	254
70	0.008	203
80	0.0065	165
90	0.0057	145
100	0.0048	122
120	0.0040	102
150	0.0035	89
180	0.0030	76
220	0.0025	63

* The conversions listed are for various grits sized according to the Bureau of Standards specifications, under Simplified Practice Recommendation 118-50



For more information on Washington Mills' pressure blasting abrasives, consult our nearest Industrial Distributor or contact us directly.

Tel: 716-278-6600
Or Toll Free: 1-800-828-1666
Visit our website:
www.washingtonmills.com

WASHINGTON MILLS



DURALUM® SPECIAL WHITE



General Inquiries
Tel: 1-800-828-1666
info@washingtomills.com
www.washingtomills.com

Washington Mills
PO Box 428
20 North Main Street
North Grafton, MA 01536
Tel: 508-839-6511
Fax: 508-839-7675
Email: info@washingtomills.com

Washington Mills
PO Box 423
1801 Buffalo Avenue
Niagara Falls, NY 14302
Tel: 716-278-6600
Fax: 716-278-6650
Email: info@washingtomills.com

Washington Mills
PO Box 1002
7780 Stanley Avenue
Niagara Falls, Ontario L2E 6V9 Canada
Email: info@washingtomills.com

Washington Mills
1000 E. Niagara Street
Tonawanda, NY 14150
Email: info@washingtomills.com

Washington Mills
Mosley Road, Trafford Park
Manchester M17 1NR England
Email: info@washingtomills.com

The Exolon Company
13230 ESK Street
Hennepin, IL 61327
Email: info@washingtomills.com

Orkla Exolon
NO-7300 Orkanger
Norway
Email: orkla.exolon@orex.no

DESCRIPTION

DURALUM® SPECIAL WHITE is a virgin fused white aluminum oxide. It is a friable, high purity, medium density, abrasive.

APPLICATIONS

DURALUM® SPECIAL WHITE is a white aluminum oxide designed for general industrial use in operations such as lapping, polishing, refractory coating for investment cast shells, decorative non-skid tile, and pressure blasting. It is used where a high purity and/or highly friable abrasive is desired.

TYPICAL CHEMICAL ANALYSIS

Al ₂ O ₃ (by difference)	99.77%
SiO ₂	0.02%
Fe ₂ O ₃	0.01%
Na ₂ O	0.20%

GRAIN SIZES AVAILABLE

8, 10, 12, 14, 16, 20, 24, 30, 36, 46, 54, 60, 70, 80, 90, 100, 120, 150, 180, 220, and 240

POWDER SIZES AVAILABLE

240, 280, 320, 360, 400, 500, 600, 800, 1000, 1200, F, FF, and FFF

TYPICAL PHYSICAL PROPERTIES

Crystallography	Alpha alumina, in a hexagonal crystal
Color	White
Specific Gravity	3.96
Knoop ₁₀₀ Hardness	2000
Shape	Blocky, with sharp edges
Grading (Grain)	ANSI B74.12-1992, Table 2 OR FEPA 42-GB-1984 (R1993)
Grading (Powder)	ANSI B74.10-1977 (R1988) OR FEPA 42-GB-1984 (R1993)
Bulk Density (Grain)	ANSI B74.4-1977 (R1992)

TYPICAL BULK DENSITY

Grit	g/cc	Grit	g/cc	Grit	g/cc	Grit	g/cc
8	1.73	20	1.76	54	1.75	100	1.64
10	1.74	24	1.76	60	1.72	120	1.62
12	1.75	30	1.77	70	1.70	150	1.60
14	1.75	36	1.77	80	1.68	180	1.57
16	1.75	46	1.78	90	1.66	220	1.54

This product information is NOT a specification. It is offered in good faith only as a general description of the product. **Washington Mills makes no warranty of merchantability or of fitness for any particular purpose.** The product chemistry and other characteristics may vary or contain trace elements not specifically listed. If your intended application for this product is so critical that relatively minor variations in chemistry or physical properties could cause problems or damage to your process or product, please contact our office for further assistance.

WASHINGTON MILLS